



SUPPORTI TIRO CINGHIA

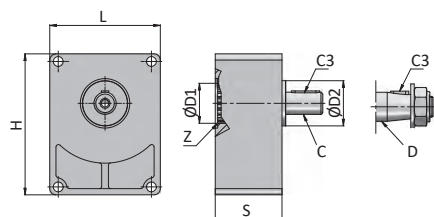


SUPPORTO TIRO CINGHIA									
Codice	Pompa	Ø D1	Z DIN 5482	Ø D2	Albero	C3	L	H	S
SP-U1P	GR.1	25,4	Z14 - 25x22	50,8	C = Ø 18	6x6x25	75,0	93,0	40,0
SP-2	GR.2	36,5	Z14 - 25x22	36,5	C = Ø 18	6x6x30	89,4	114,0	54,5
SP-3	GR.3	50,8	Z16 - 35x31	50,8	C = Ø 24	8x7x40	123,5	153,2	52,0
SP-U1PC	GR.1	25,4	Z14 - 25x22	50,8	D = 9,7 Conico 1:8	4x6,5	75,0	93,0	40,0
SP-2C	GR.2	36,5	Z14 - 25x22	36,5	D = 17,2 Conico 1:8	4x6,5	89,4	114,0	54,5
SP-3C	GR.3	50,8	Z16 - 35x31	50,8	D = 22,2 Conico 1:8	4x7,5	123,5	153,2	52,0

LANTERNE E GIUNTI

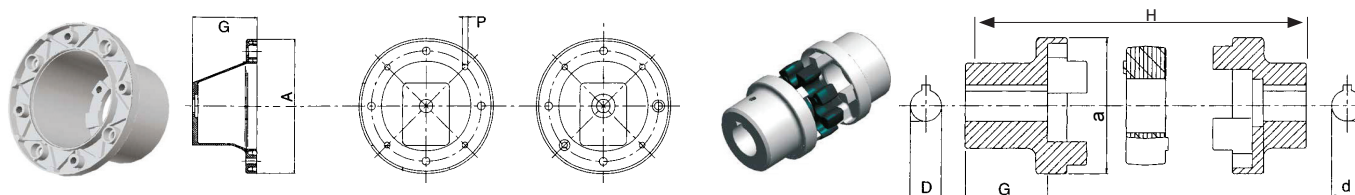

Motore 4 poli 1450 giri/min.			Pompa	Lanterna	Dimensione lanterna (mm)			Giunto completo				Inserto elastico ricambio	
kW	Taglia	HP	Tipo	Codice	A	G	P	H	D	d	a	Codice	Codice
0,25 ÷ 0,37	71	0,35 ÷ 0,55	05 M	LS160	160	70	M8	64	14	6 cil.	48	ND1	R-42
			U 1 P	LS161	160	70	M8	62	14	9,7 con. 1:8	48	ND2	R-42
0,55 ÷ 0,75	80	0,75 ÷ 1	05 M	LS210	200	87	M10	81	19	6 cil.	48	ND4B	R-42
			U 1 P	LS211	200	87	M10	78	19	9,7 con. 1:8	48	ND5A	R-42
			2	LS203	200	95	M10	87	19	17,2 con. 1:8	65	ND7	R-62
			U 1 P	LS201	200	95	M10	87	24	9,7 con. 1:8	48	ND70A	R-42
1,1 ÷ 1,5	90	1,5 ÷ 2	U 1 P	LS201	200	95	M10	87	24	9,7 con. 1:8	65	ND8	R-62
			2	LS203	200	95	M10	87	24	17,2 con. 1:8	65	ND10	R-62
			U 1 P	LS250	250	105	M12	97	28	9,7 con. 1:8	65	ND11	R-62
			2	LS252	250	105	M12	97	28	17,2 con. 1:8	65	ND13	R-62
			2	LS253	250	115	M12	107	28	17,2 con. 1:8	65	ND61	R-62
			3 U	LS255	250	115	M12	107	28	22,2 con. 1:8	65	ND61C	R-62
			2	LS253	250	115	M12	107	28	17,2 con. 1:8	86	ND14	R-82
			3 U	LS255	250	115	M12	107	28	22,2 con. 1:8	86	ND15	R-82
5,5 ÷ 9	132	7,5 ÷ 12	2	LS300	300	143	M12	135	38	17,2 con. 1:8	86	ND16	R-82
			3 U	LS302	300	143	M12	135	38	22,2 con. 1:8	86	ND17	R-82
			35 U	LS306	300	143	M12	135	38	25,6 con. 1:8	108	ND18C	R-103
			2	LS350	350	178	M16	168	42	17,2 con. 1:8	108	ND43A	R-103
11 ÷ 15	160	15 ÷ 20	3 U	LS352	350	178	M16	168	42	22,2 con. 1:8	108	ND43C	R-103
			35 U	LSE356	350	186	M16	176	42	25,6 con. 1:8	108	ND21	R-103
			4 U	LSE358	350	186	M16	176	42	33,3 con. 1:8	108	ND22	R-103
			3 U	LS352	350	178	M16	168	48	22,2 con. 1:8	108	ND44C	R-103
18,5 ÷ 22	180	25 ÷ 30	35 U	LSE356	350	188	M16	176	48	25,6 con. 1:8	108	ND25	R-103
			4 U	LSE358	350	188	M16	176	48	33,3 con. 1:8	108	ND26	R-103

ACCUMULATORI IDROPNEUMATICI A MEMBRANA



ACCUMULATORI IDROPNEUMATICI A MEMBRANA - PRESS. MAX 300 BAR - PRECARICA N2 MAX 210 BAR						
Codice	Volume azoto Lt.	H mm.	D mm.	B mm.	Portata max Lt./min.	Peso Kg.
HST0.12	0,12	151	53	130	45	1,6
HST0.15	0,15	141	80	94	45	2,5
HST0.35	0,35	152	101	100	50	4
HST0.5	0,50	175	124	120	60	5,5
HST0.7	0,70	218	100	80	55	5,5
HST0.8	0,80	185	138	85	60	6,3
HST1.5	1,50	270	138	160	55	8,9
HST2.3	2,30	340	138	165	55	11,5